



**MINIMUM REQUIREMENTS FOR DUMPSTER APPROACH, PAD, AND ENCLOSURE SIZE AND DETAILS**

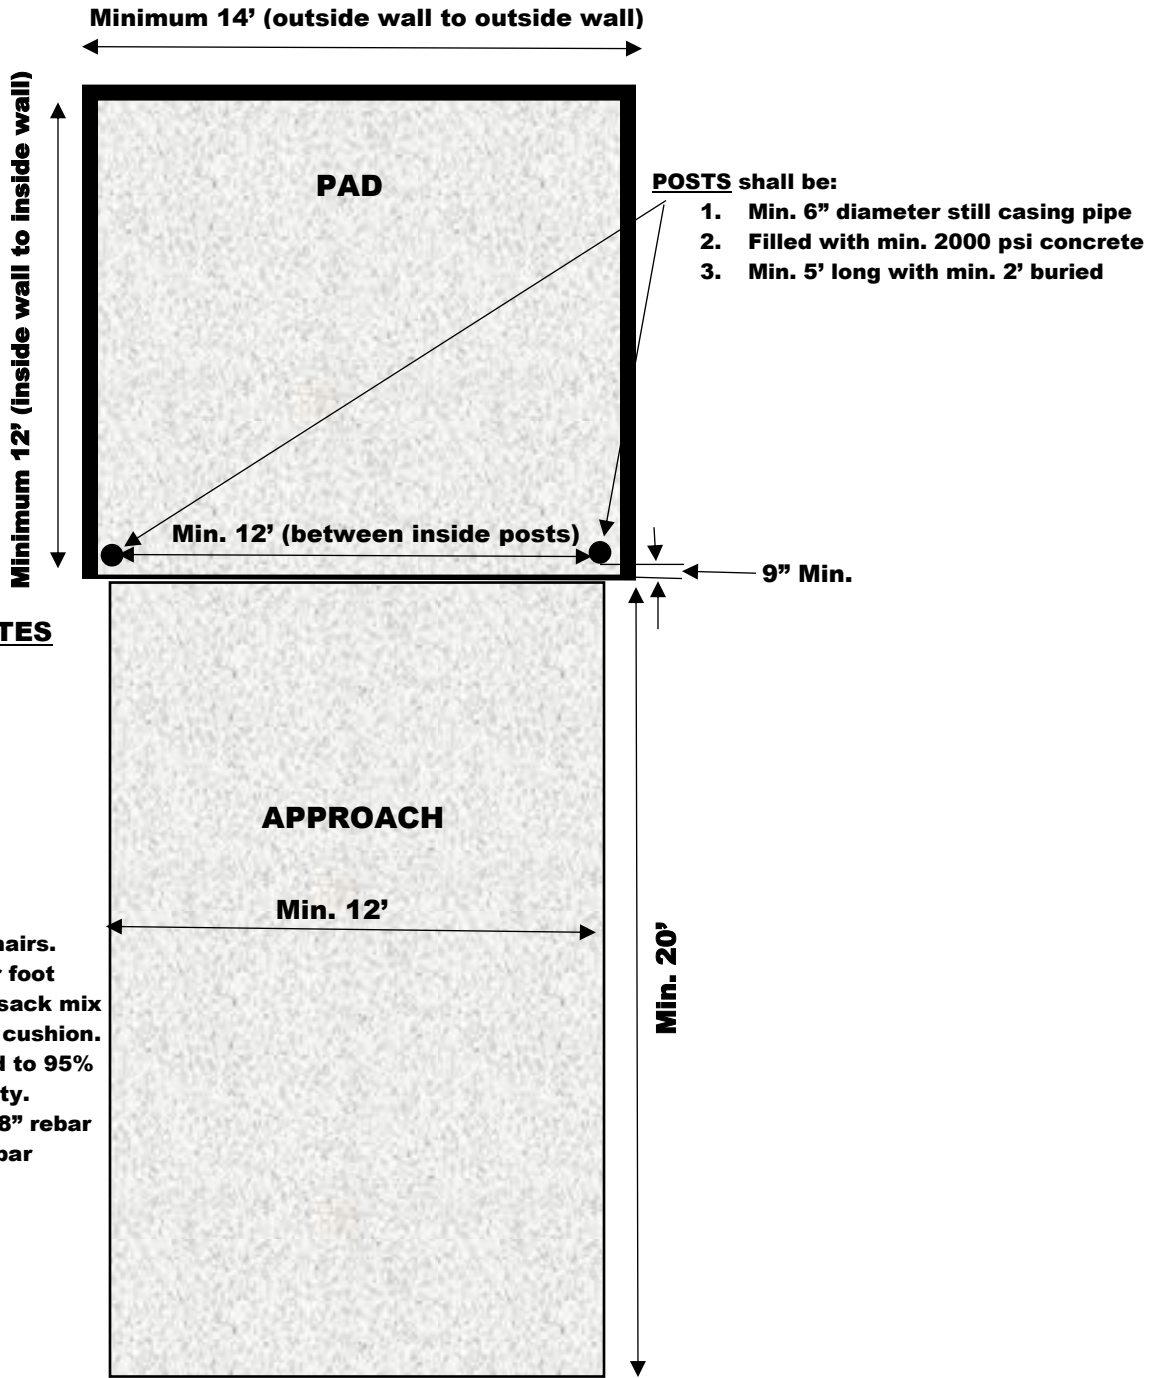

**PAD AND APPROACH NOTES**



1. Steel @ 18" oc with plastic chairs.
2. Sloped a minimum of 1/8" per foot
3. Concrete to be a minimum 5 sack mix
4. 3,000 psi, placed on 2" sand cushion.
5. Subgrade shall be compacted to 95% of the standard proctor density.
6. Pad = minimum 4" thick w/ 3/8" rebar
7. Approach = 6" thick w/ 1/2" rebar

1. The pad / enclosure shall be located a minimum of thirty (30) feet from all residential lots.
2. There shall be no overhead / hanging wires within twenty-three (23) feet & seven (7) inches of the enclosure and/or required approach.
3. A driveway or parking lot abutting the approach having a minimum of twenty-two (22) feet in width is required, and must be capable of supporting vehicles of sixty-four thousand (64,000) pounds gross vehicle weight.
4. A turnaround area of at least thirty (30) feet minimum turning radius or another accessible safe exit for the truck is required.
5. The angle between the dumpster access line of travel and the direction to the container shall not exceed forty-five (45) degrees.
6. Minimum inside curve radii shall be thirty-five (35) feet, and the minimum outside curve radii shall be fifty-seven (57) feet.
7. Driveway grade shall not exceed six (6) percent.
8. A minimum eight (8) foot solid wood or metal gate for the purpose of access is required.